


High capacity and thermostatically controlled, RWC chillers can supply one or more aquaBUBBLERs simultaneously.

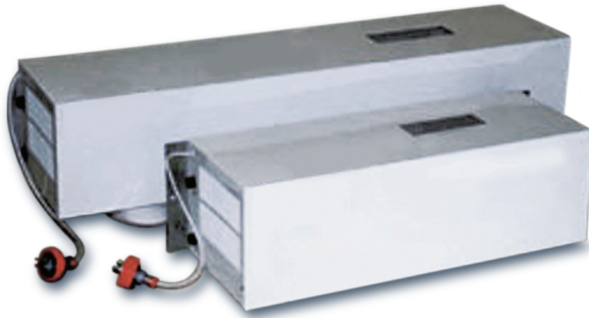

RWC 15
76L chilled water/hr

RWC 7.5
72L chilled water/hr

These reliable chillers are installed externally to the aquaBUBBLER in order to minimise condensation and to ensure optimal refrigeration.

RWC chillers switch off when not needed - at ambient temperatures below 21C - thereby saving on energy expenditure and prolonging the life of the unit.

RWC chillers must be mounted horizontally - either resting on a surface or wall-mounted - and located to allow for adequate air circulation around the unit.

All electrical wiring is double insulated; and the holding tank is easily backwashed to remove any sediment buildup. All water lines and fittings are insulated to prevent condensation.


RWC chillers produce approx 72/76 L/hr (7.5 and 15 models respectively); can be connected to the mains or a low pressure filtration system; and come with 2 year warranty, along with Watermark certification.


SPECIFICATIONS

RWC 7.5

Dimensions L x W x H (cm):	85 x 34 x 27.5
Weight (kg):	39
Storage Tank Vol (L):	7.5
Water Fittings:	1/2" BSP inlet/outlet
Output (L/hr):	72

Length 

Width 

Height 

RWC 15

Dimensions L x W x H (cm):	135 x 34 x 27.5
Weight (kg):	41
Storage Tank Vol (L):	15
Water Fittings:	1/2" BSP inlet/outlet
Output (L/hr):	76

Functional

Working Principle:	Vapour Compression
Refrigerant:	R134a
Temperature Control:	Thermostat
Max Working Pressure:	700kpa
Power Supply:	220/240 volts/50Hz/1PH/2.6 amps/395 watts/IP33

Materials & Finishing

Casing:	Stainless Steel
Nuts/bolts/screws:	Stainless Steel
Mounting Brackets:	Stainless Steel (heavy gauge 6 x 10 x 250mm)
Colour:	White

RWC chillers are manufactured by Frigmac and carry a **2 Year Warranty**

