


Wall Drinking aquaBUBBLER Installation Guide

[Version 11: Jul 2024] Get the latest version at bit.ly/wd-installation

Product Code: **ABWD22**

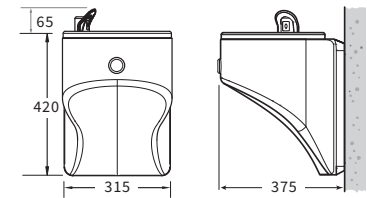

★ IMPORTANT ★



1. Unit must be installed by a **Certified Plumber**

2. Installation must be in accordance with



AS/NZS 3500.1 & AS/NZS 3500.2

max water pressure 1000 kPa, max temp 40°C


Nonadherence to any of the above, or failure to follow the steps detailed in this guide, will VOID ALL WARRANTIES

Install onto :

Solid/ Brick Wall ✓ **Stud Plaster Wall** ✓



Prepare Connection Points for installation

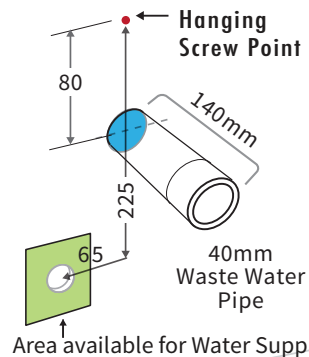


Use Hanging Screw point (50mm below the desired height of the wall drinking dish) as reference to prepare the location of **Water Outlet** and **Water Inlet**


More Details on Schematic >

1 Disassemble Wall Bracket from Lid & Moulded Body


- Lay unit on it's back on a table. Remove 4 x Security Screws around the Stainless Steel lid with the T30 Post Torx Screwdriver (supplied).



- Lift the lid slightly away from the molded body. Disconnect the water dispenser supply line by holding back the **grey collet ring** on the bottom of the water dispenser and pulling out the black tubing.




- After disconnect the lid, remove 4 x PH screws to release unit body from the internal wall bracket.
- Lift the molded body off internal wall bracket.




2 Set up Hanging Screw & Connection Points

Consult SCHEMATIC – bit.ly/wd23sch mark other connection points referencing the Hanging Screw (Leave head off wall surface for 2mm)



3 Connect Waste Water Outlet

Fit off the mini P-trap (supplied) to the end of the waste water pipe with **Sealant**.



4 Hang up Unit


Hang unit on wall over the Hanging Screw. Place the internal bracket over the mini P-trap and locate the keyhole onto the hanging screw. Use a **spirit level** to set the position of bracket to the wall.

Anchor unit to wall with Screws (at least 4 corners).

- Solid wall - screws + green plugs (supplied) along sides
- Stud wall - Tek screws (supplied) along centre into timber stud

5 Connect Water Inlet


Connect water inlet to 1/2" BSP connection, isolation valve and variable flow/pressure regulator. Adjust here if needed. It may need readjustment after 48 hours.



- Demonstrate the simple task of water pressure adjustment to the facilities manager to avoid an unnecessary return visit.*

6 Reassemble Moulded Body & Lid to Wall Bracket

- Slide molded body over bracket to the wall.
- Secure in place by re-screwing in the 4 x PH screws.
- Refit black tubing by pushing straight back into the bottom of the water dispenser with the lid.
- Rescrew 4 x Security screws around the lid.



7 Finishing

Run tap and check for leaks →



8 Before You Go

Leave T30 Post Torx Security Screwdriver with client

