CLASSIC REFILL aquaBUBBLER

SCHEMATICS



Lead Free

AUSTRALIAN MADE

RECYCLABLE

5 YEAR WARRANTY

Materials & Workmanship
Full terms at
bit.ly/ab-warranty

ABR246 Schematic
(600mm height)

ABR247 Schematic
(700mm height)

ABR248 Schematic
(800mm height)

ABR249 Schematic
(950mm height)

Accessories Schematic

Classic Refill aquaBUBBLER - 600mm


Code: ABR246 Get install guide: bit.ly/CR-installation **SCHEMATIC**

IMPORTANT


1. Unit must be installed by a **Licensed Plumber**
2. Installation must be in accordance with AS/NZS 3500.1 & AS/NZS 3500.2 Max water pressure 1000 kPa, Max temp 40°C
3. Where installed in frost-prone areas, unit must be fitted with an Anti-Freeze Valve.
4. Unit must have **≥150mm** clearance from ALL walls
5. Unit must be installed on a **flat & level** surface

Faults caused by an install that does not meet the above are not covered by warranty. Australian Consumer Law rights are unaffected.

ABOVE Ground Plumbing Connection

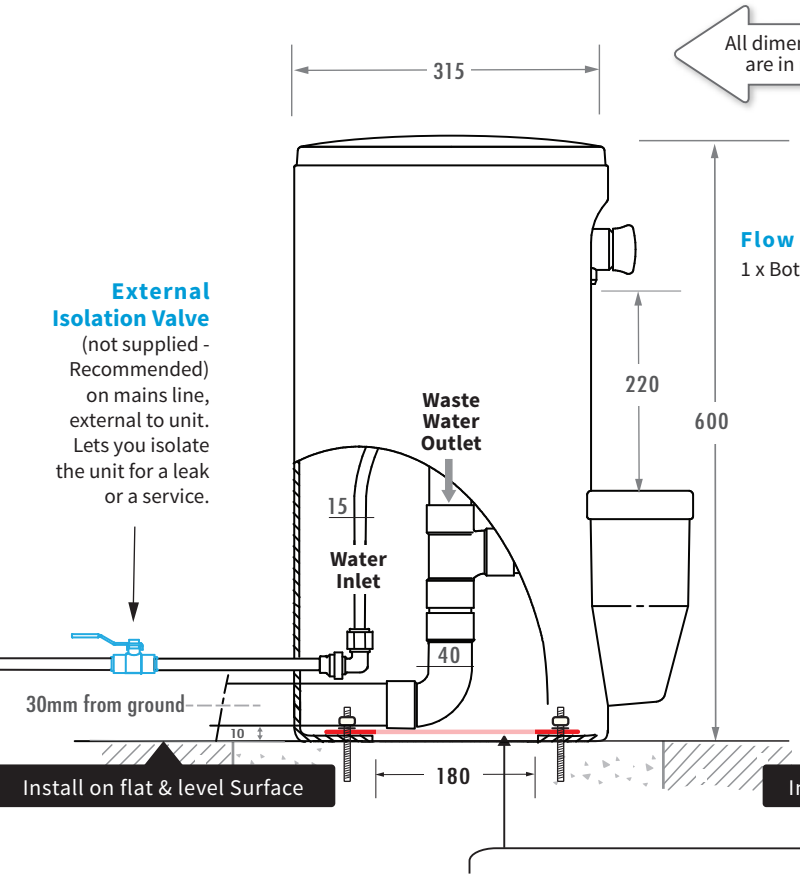


BELOW Ground Plumbing Connection

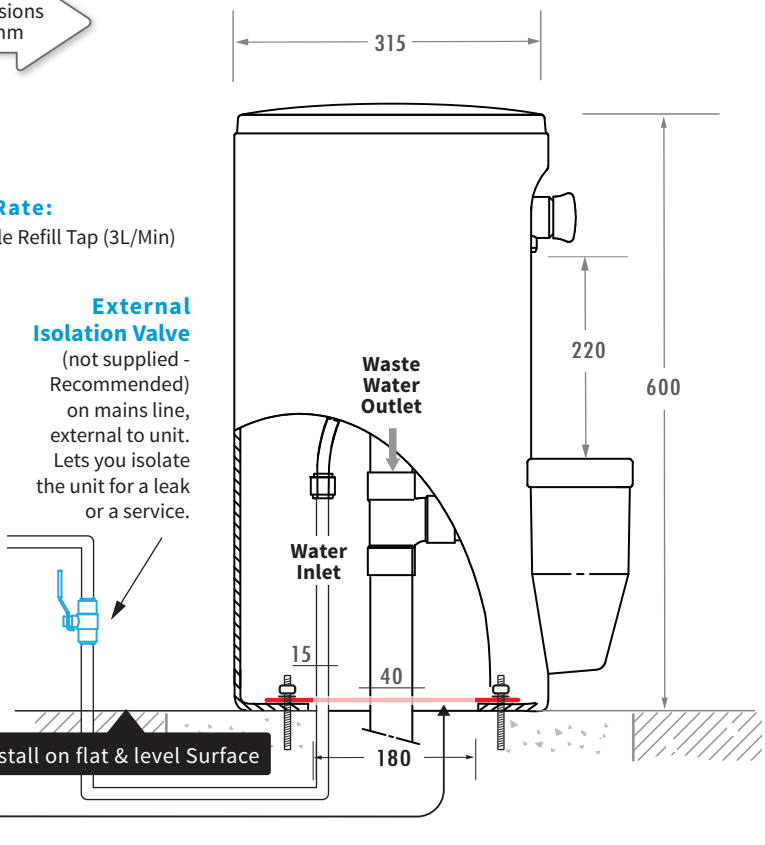


ROUGH IN with Internal Base Mounting Plates (IBMP)

IMPORTANT: Installed unit must have **≥150mm** clearance from ALL walls.


A. Place the IBMP on **LEVEL** mounting surface and mark holes. Make sure the intended Refill pod position is between (any) two holes.

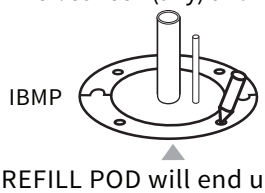


B. Lift the IBMP off the ground and set aside. **FIT OFF** either 12mm threaded rods or 16mm dynabolts (anchors).



C. PLACE UNIT over anchors.




D. LOWER IBMP inside the unit over the anchors and secure.



Check that ground is level


If ground is NOT LEVEL, recess a level area as suggested:

Ensure all edges are beveled to avoid trip hazard

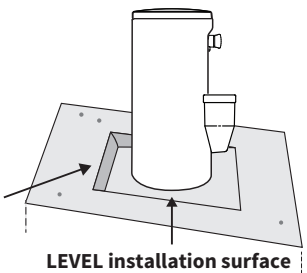

Determine Unit Orientation

Where possible, locate water inlet and waste water outlet on **wall side**.

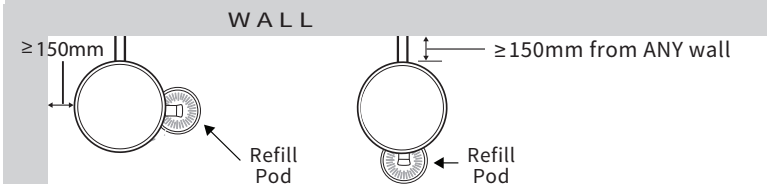

Classic Refill aquaBUBBLER - 700mm


Code: ABR247 Get install guide: bit.ly/CR-installation **SCHEMATIC**

IMPORTANT


1. Unit must be installed by a **Licensed Plumber**
2. Installation must be in accordance with AS/NZS 3500.1 & AS/NZS 3500.2 Max water pressure 1000 kPa, Max temp 40°C
3. Where installed in frost-prone areas, unit must be fitted with an Anti-Freeze Valve.
4. Unit must have **≥150mm** clearance from ALL walls
5. Unit must be installed on a **flat & level** surface

Faults caused by an install that does not meet the above are not covered by warranty. Australian Consumer Law rights are unaffected.

ABOVE Ground Plumbing Connection

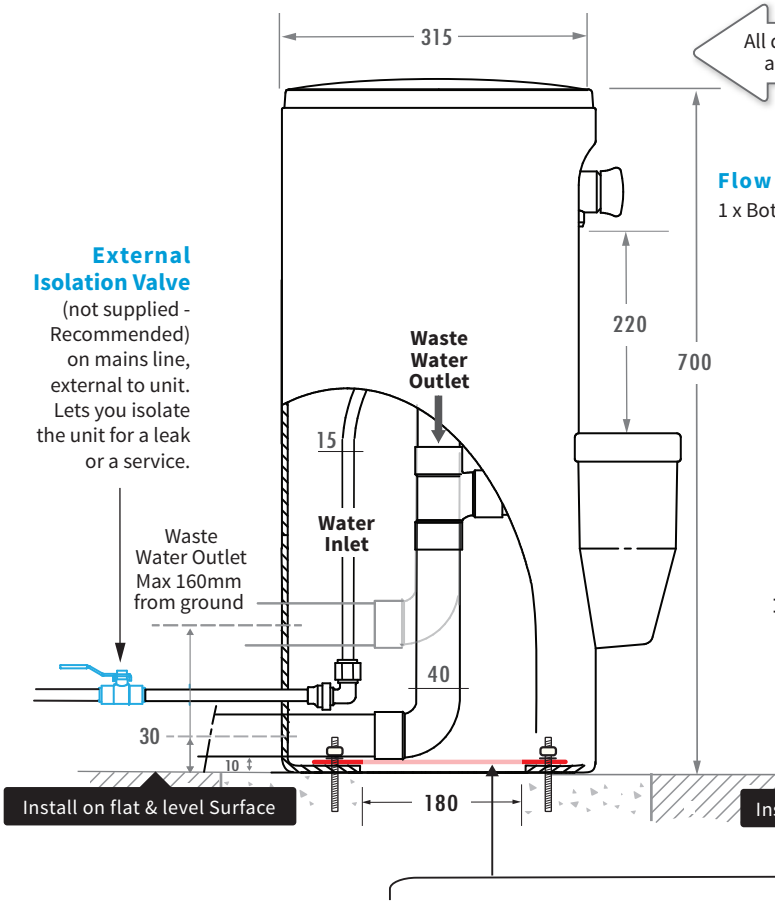


BELOW Ground Plumbing Connection

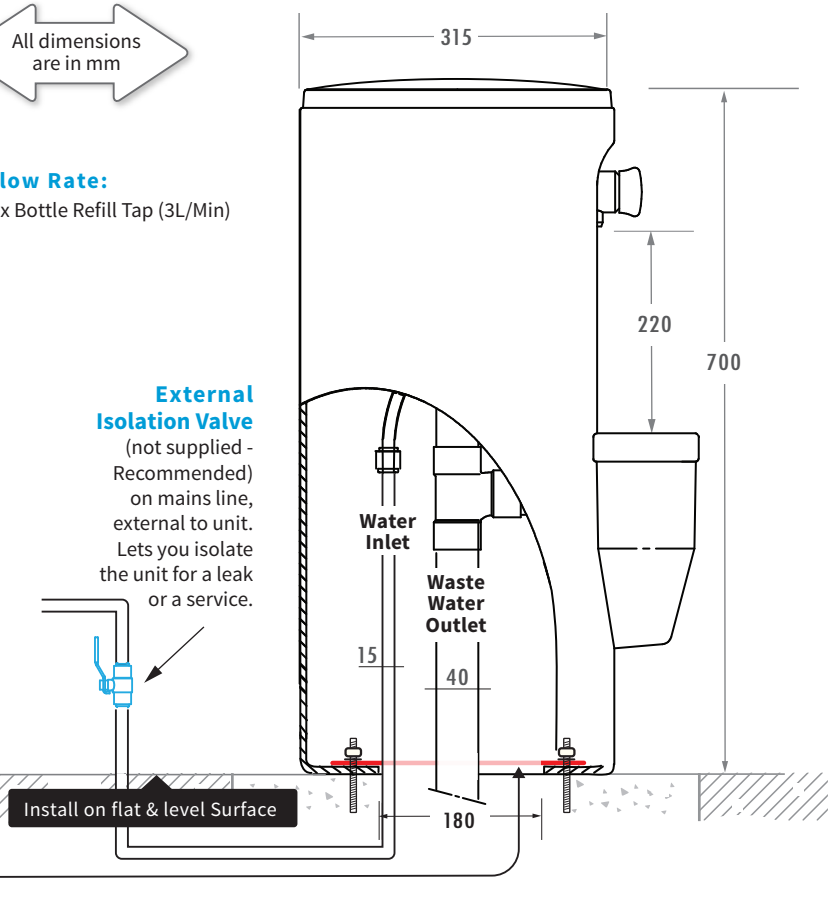


ROUGH IN with Internal Base Mounting Plates (IBMP)

IMPORTANT: Installed unit must have **≥150mm** clearance from ALL walls.


A. Place the IBMP on **LEVEL** mounting surface and mark holes. Make sure the intended Refill pod position is between (any) two holes.




B. Lift the IBMP off the ground and set aside. **FIT OFF** either 12mm threaded rods or 16mm dynabolts (anchors).



C. PLACE UNIT over anchors.




D. LOWER IBMP inside the unit over the anchors and secure.



Check that ground is level


If ground is NOT LEVEL, recess a level area as suggested:

Ensure all edges are beveled to avoid trip hazard



Determine Unit Orientation

Where possible, locate water inlet and waste water outlet on **wall side**.

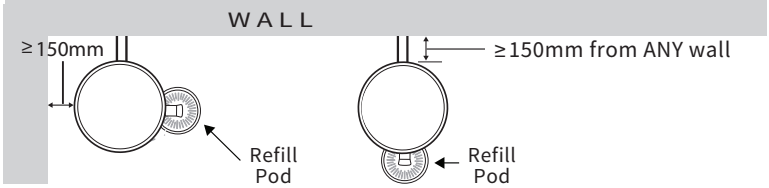

Classic Refill aquaBUBBLER - 800mm


Code: ABR248 Get install guide: bit.ly/CR-installation **SCHEMATIC**

IMPORTANT


1. Unit must be installed by a **Licensed Plumber**
2. Installation must be in accordance with AS/NZS 3500.1 & AS/NZS 3500.2 Max water pressure 1000 kPa, Max temp 40°C
3. Where installed in frost-prone areas, unit must be fitted with an Anti-Freeze Valve.
4. Unit must have **≥150mm** clearance from ALL walls
5. Unit must be installed on a **flat & level** surface

Faults caused by an install that does not meet the above are not covered by warranty. Australian Consumer Law rights are unaffected.

ABOVE Ground Plumbing Connection

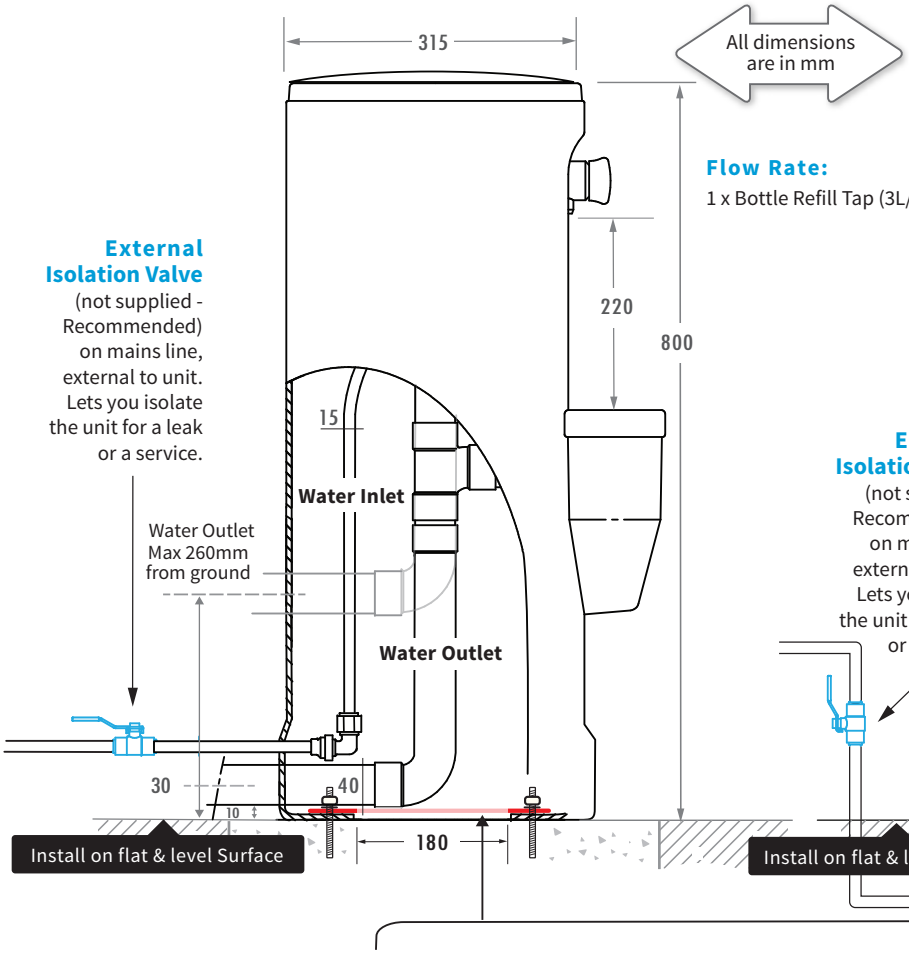


BELOW Ground Plumbing Connection

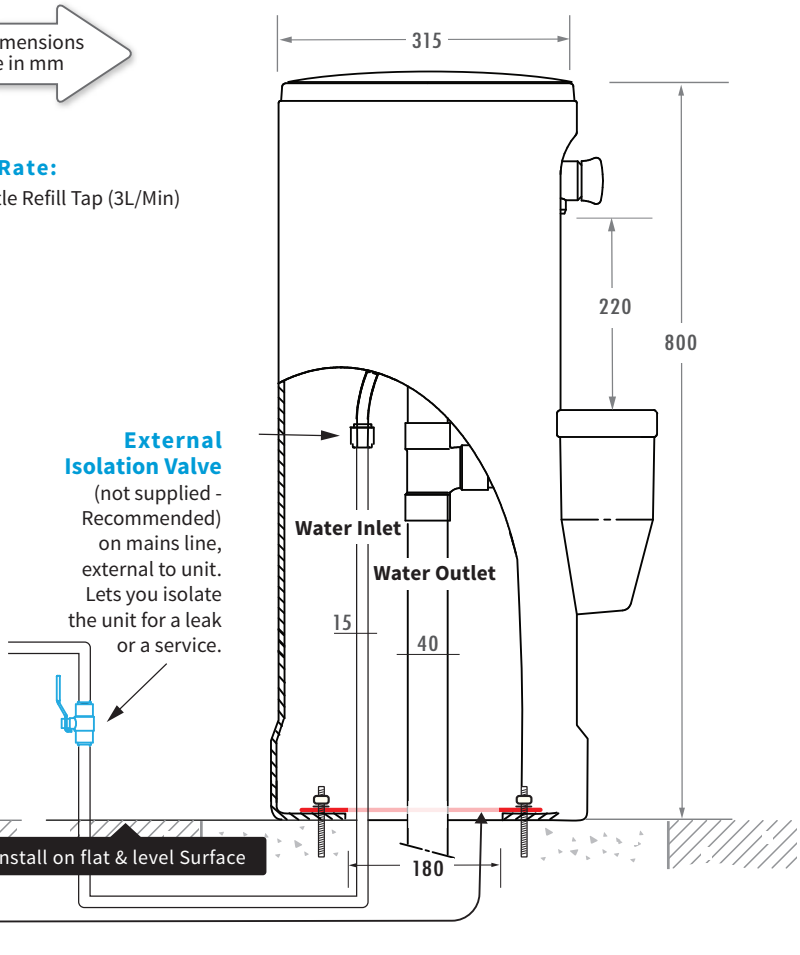


ROUGH IN with Internal Base Mounting Plates (IBMP)

IMPORTANT: Installed unit must have **≥150mm** clearance from ALL walls.


A. Place the IBMP on **LEVEL** mounting surface and mark holes. Make sure the intended Refill pod position is between (any) two holes.




B. Lift the IBMP off the ground and set aside. **FIT OFF** either 12mm threaded rods or 16mm dynabolts (anchors).



C. PLACE UNIT over anchors.




D. LOWER IBMP inside the unit over the anchors and secure.



Check that ground is level


If ground is NOT LEVEL, recess a level area as suggested:

Ensure all edges are beveled to avoid trip hazard



Determine Unit Orientation

Where possible, locate water inlet and waste water outlet on **wall side**.

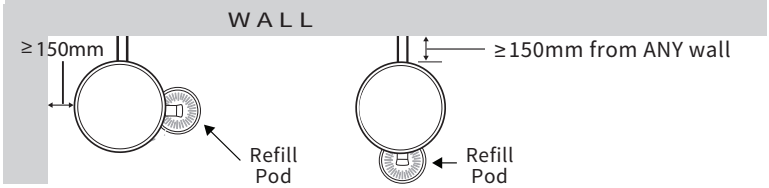

Classic Refill aquaBUBBLER - 950mm


Code: ABR249 Get install guide: bit.ly/CR-installation **SCHEMATIC**

IMPORTANT

1. Unit must be installed by a **Licensed Plumber**
2. Installation must be in accordance with AS/NZS 3500.1 & AS/NZS 3500.2 Max water pressure 1000 kPa, Max temp 40°C
3. Where installed in frost-prone areas, unit must be fitted with an Anti-Freeze Valve.
4. Unit must have **≥150mm** clearance from ALL walls
5. Unit must be installed on a **flat & level** surface

Faults caused by an install that does not meet the above are not covered by warranty. Australian Consumer Law rights are unaffected.


ABOVE Ground Plumbing Connection

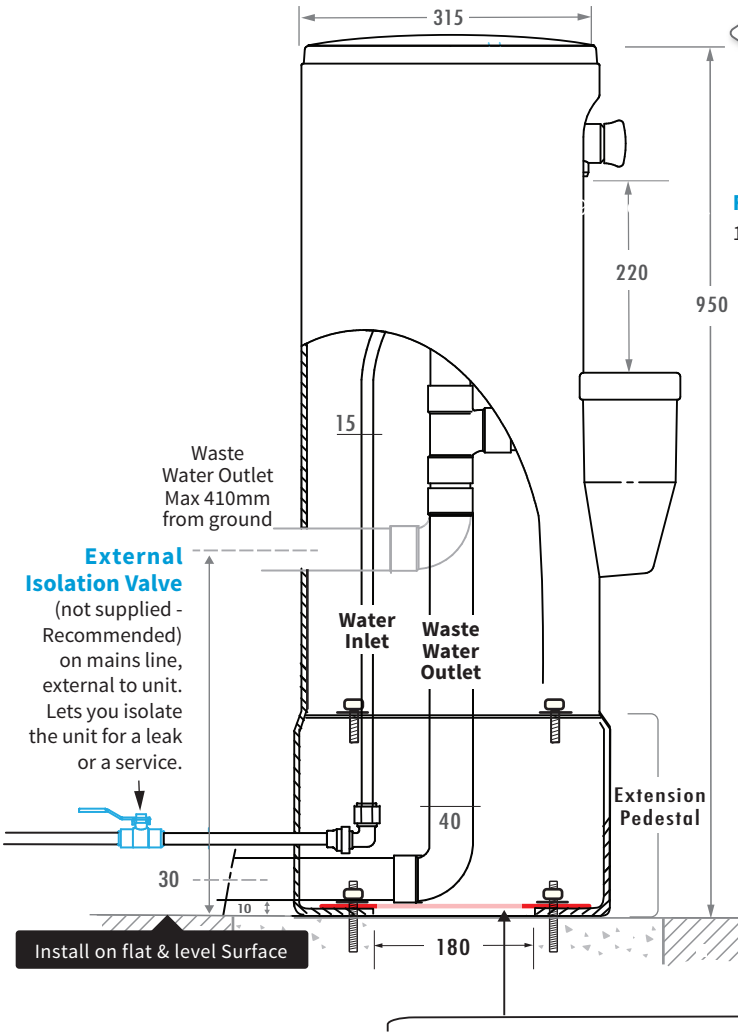

All dimensions are in mm

Flow Rate:
1 x Bottle Refill Tap (3L/Min)


BELOW Ground Plumbing Connection

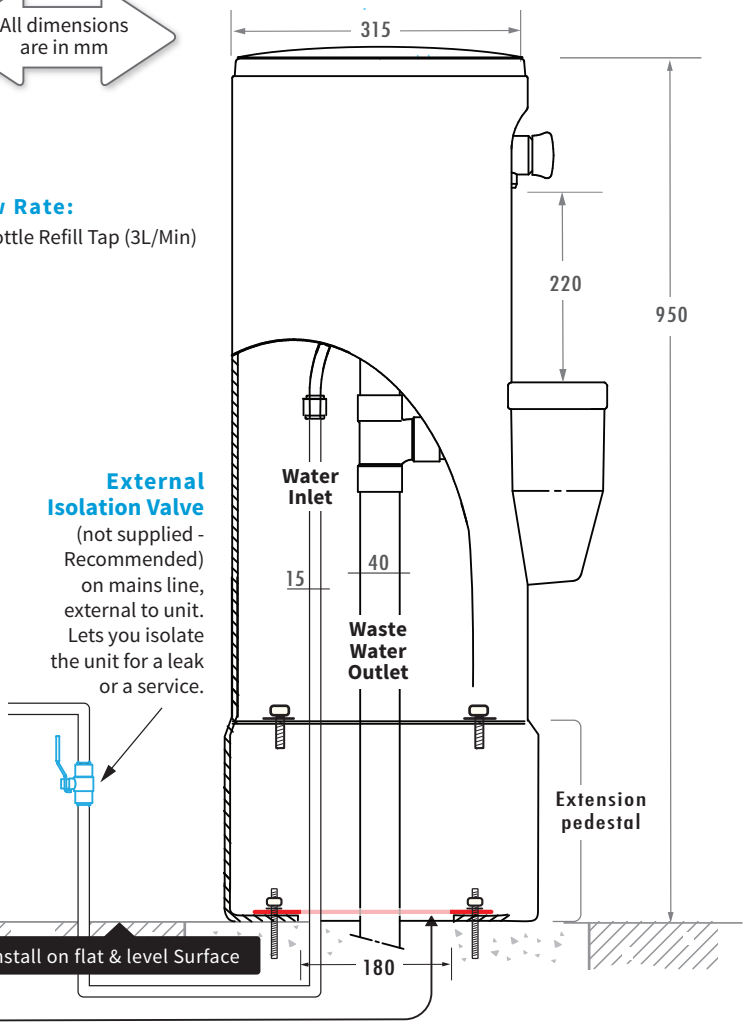


ROUGH IN with Internal Base Mounting Plates (IBMP)

IMPORTANT: Installed unit must have **≥150mm** clearance from ALL walls.


A. Place the IBMP on **LEVEL** mounting surface and mark holes. Make sure the intended Refill pod position is between (any) two holes.




B. Lift the IBMP off the ground and set aside. **FIT OFF** either 12mm threaded rods or 16mm dynabolts (anchors).



C. PLACE UNIT over anchors.




D. LOWER IBMP inside the unit over the anchors and secure.



Check that ground is level


If ground is NOT LEVEL, recess a level area as suggested:

Ensure all edges are beveled to avoid trip hazard



Determine Unit Orientation


Where possible, locate water inlet and waste water outlet on **wall side**.

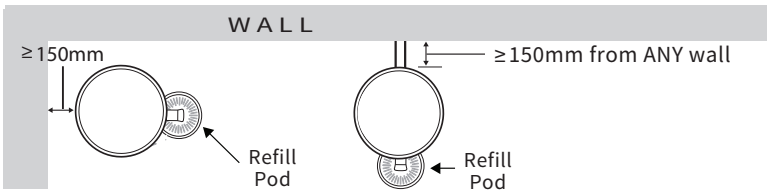

Accessories

DOG BOWL


All dimensions are in mm

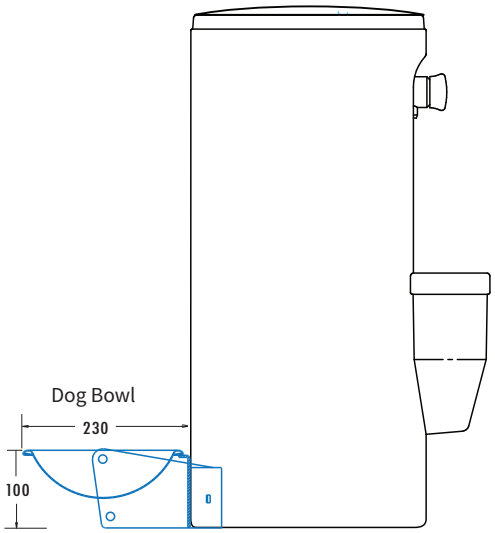


To Attach Dog Bowl

Insert coach bolts through square holes (either side of Bowl)

Secure bolts from inside of unit with washer and lock nut.

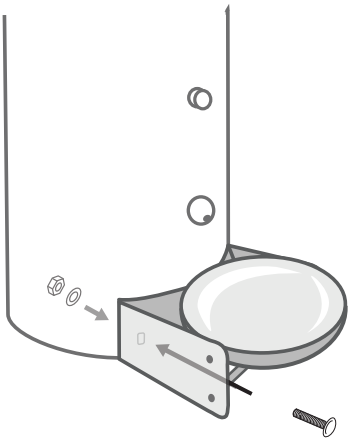


GARDEN TAP

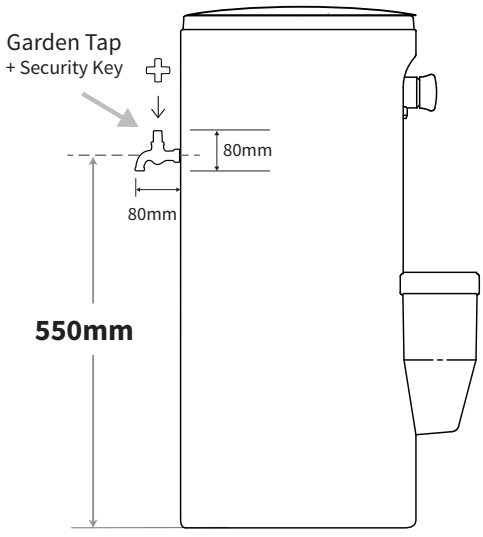

Unit supplied with Garden tap attached - no assembly required.

EXTERNAL CHILLER

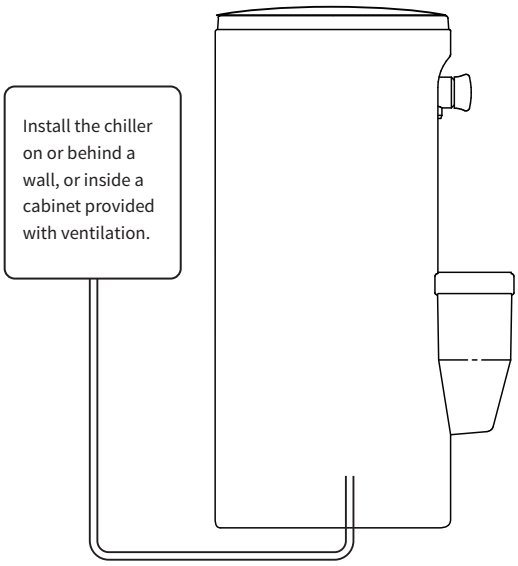

More information on the external chiller available upon request