




Twin Refill aquaBUBBLER Installation Guide

[Version 8-Mar 2024] Get the latest version: bit.ly/tab-installation

Product Code: ABS14

Page 1: Preinstallation Preparation


★ IMPORTANT ★

1. Unit must be installed by a **Certified Plumber**  
2. Installation must be in accordance with AS/NZS 3500.1 & AS/NZS 3500.2 max water pressure 1000 kPa, max temp 40°C
3. Where installed in frost-prone areas, unit must be fitted with an Anti-Freeze Valve.
4. Unit must be installed on a **flat & level** surface 


Nonadherence to any of the above, or failure to follow the steps detailed in this guide, will VOID ALL WARRANTIES

① Install onto :


Ground Work ✓




Concrete Pad ✓



Timber Floor ✓



② Determine Plumbing Connection

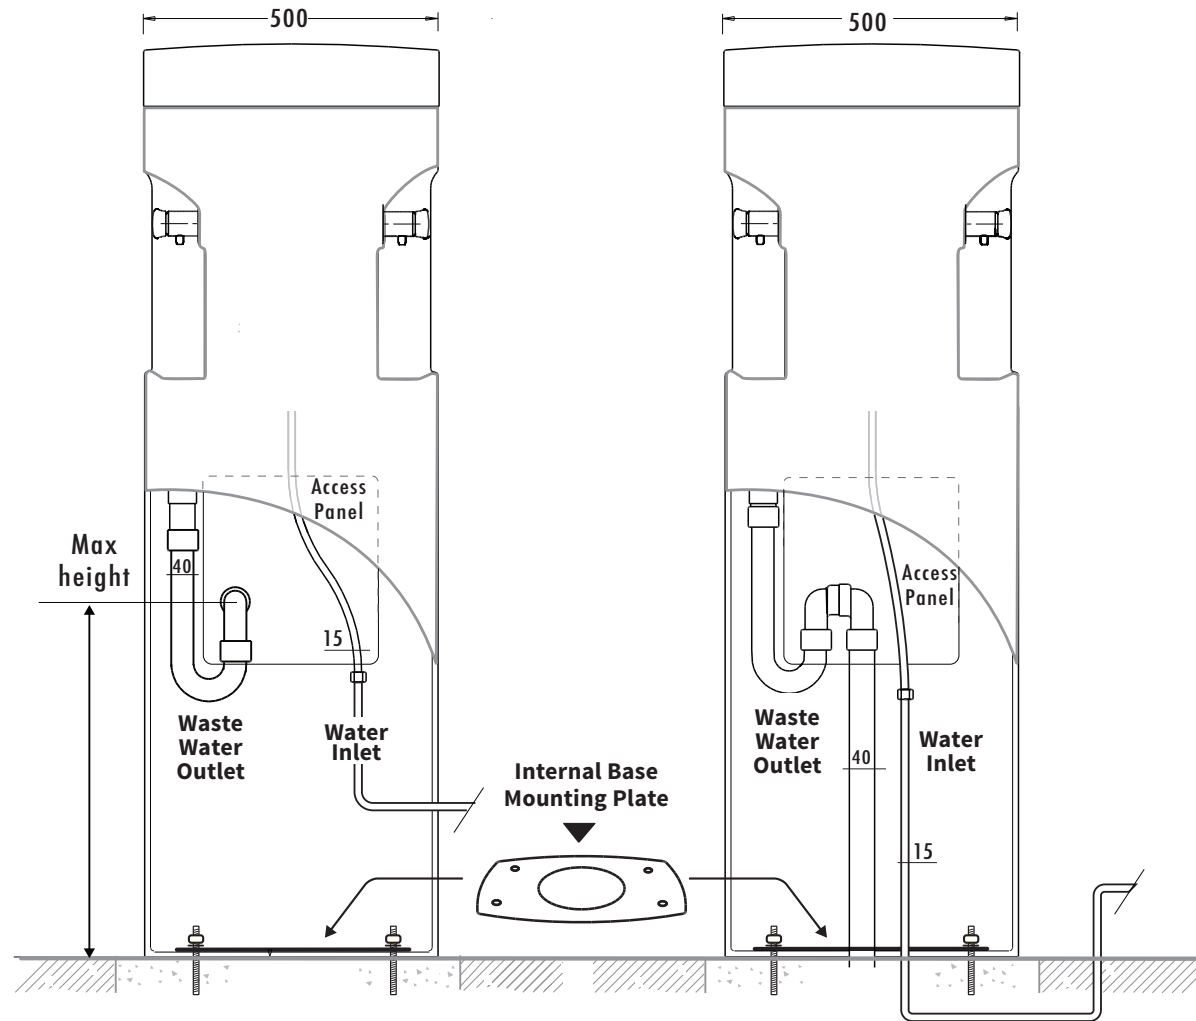

Above Ground

Below Ground

Twin Refill aquaBUBBLER Installation Guide

[Version 8-Mar 2024] Get the latest version: bit.ly/tab-installation

Product Code: ABS14

Page 2: Installation


1 Rough in with Internal Base Mounting Plate

Place Internal Base Mounting Plate (IBMP) in position on the installation surface.


- A. Mark anchor points on the surface through IBMP holes & drill out.
- B. Fit off either 12 mm threaded rods or 16mm dynabolts*
- C. Gain access to the base of the unit via Access Panel.
- D. Place unit over anchors, then place the Plate back inside unit over anchors and secure in place

**Indicates correct gauges for anchor system types listed; choice of anchor system is at installer's discretion*


ROUGHING IN

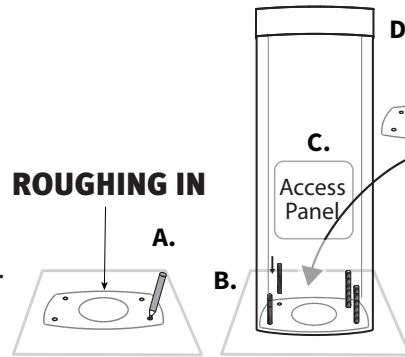

2 Expose Access Panel

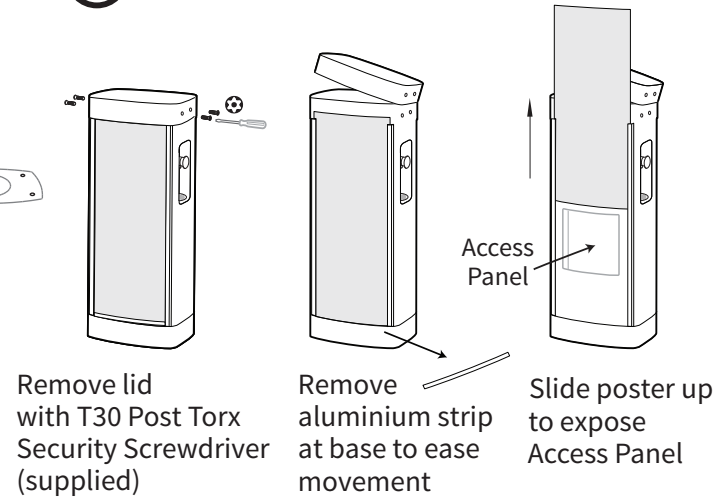


3 Flush out the lines

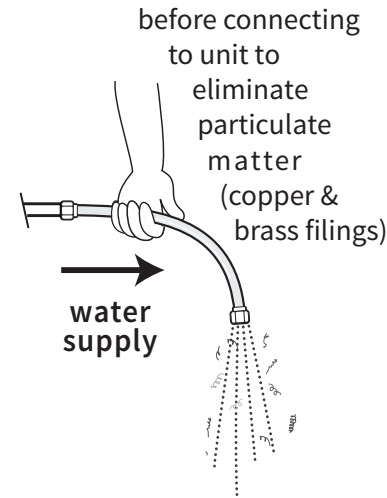

4 Install Isolation Valve (not supplied - recommended)

on mains line,
external to unit

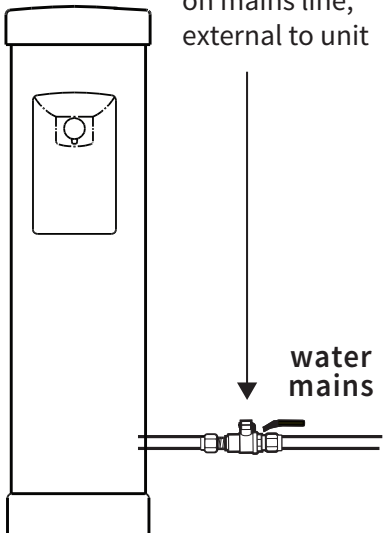


Only for units with Dog Bowl

5 Attach Dog Bowl


Insert coach bolts
through square
holes (either side
of Dog Bowl)

Secure bolts
from inside of
unit with washer
and lock nut



6 Check for leaks

Run taps and secure any
loose connections

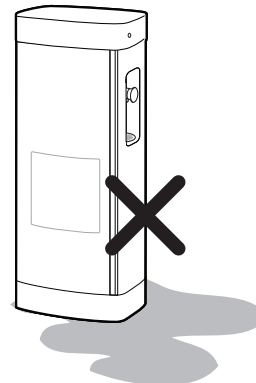

7 Reassemble Poster Secure lids with Screws by T30 Security Screwdriver



DONE !! ★

9 Before you go

Leave T30 Post Torx
Security Screwdriver
with client

